


**CO
CO 50**

-
-
-
-

20

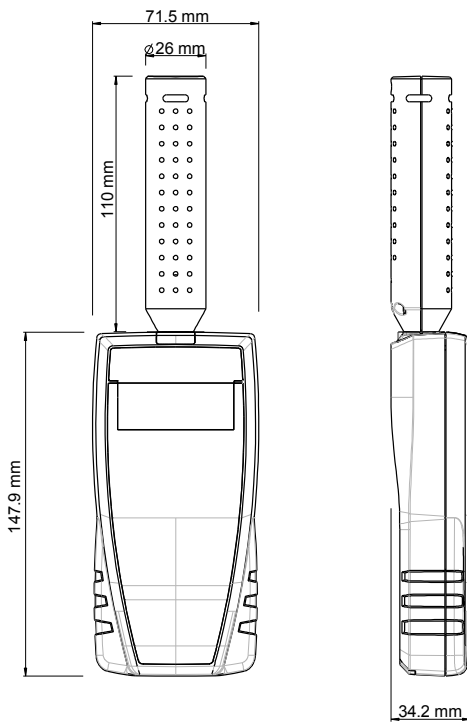

: ABS
: IP54
: 1 line
LCD 1 x 5 digits
Size : 50 x 20 mm
Height of digits :
Values : 9.2 mm
Units : 4.7 mm
: 200 g



		CO
	°C, °F	ppm
	From -20 to +80 °C	From 0 to 500 ppm
	±0.4% of reading ±0.3°C	From 0 to 100 ppm : ±3 ppm From 100 to 500 ppm : ±3% of reading
	0.1 °C	0.1 ppm
	T63 = 5	T63 = 35
	NTC	
		From 0 to +50 °C
		From -20 to +80 °C
		4 batteries AAA LR03 1.5 V
		200
	Directives CEM 2004/108/CE and NF EN 61010-1	

*All the accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation



-
- ABS
-



(02-338-0023)

가 1

(CO)

- On/Off/Hold
CO50 , 5
- Select 가 CO

- On/Off/Hold
- HOLD 가
- On/Off/Hold

- Select 가
- Select 가 :°C or °F.
- Select

-
- 가 . AAA LR03 1.5 V.
-



« Select »

« On/Off/Hold »

20

OFF



Once returned to KIMO, required waste collection will be assured in the respect of the environment in accordance to 2002/96/CE guidelines relating to WEEE.

www.kimo.fr

Distributed by :



EXPORT DEPARTMENT
Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29
e-mail : export@kimo.fr