


CP


Pressure / Depression

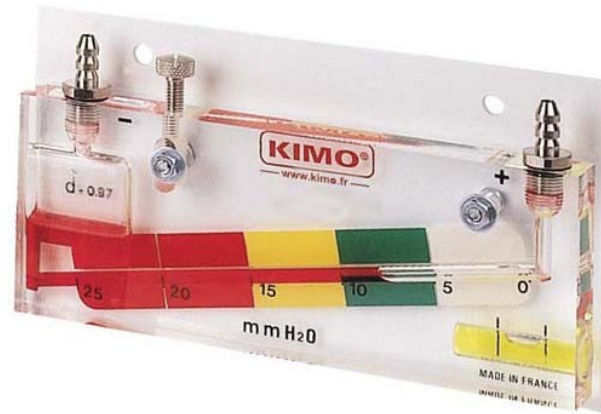

TX
HP

가

-
- 가
- , 487

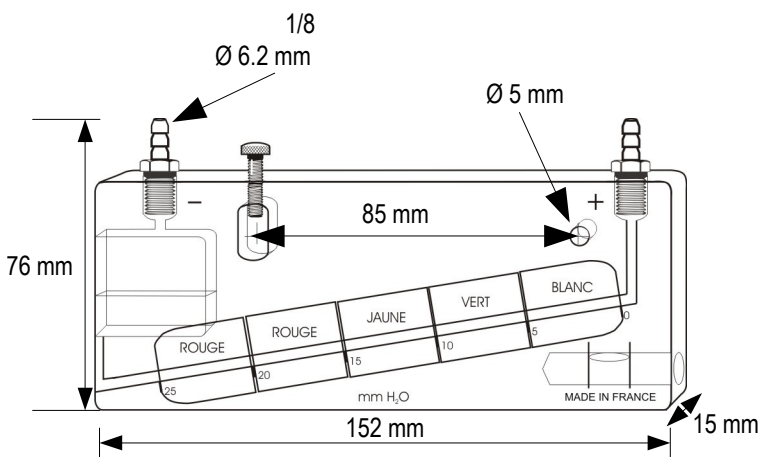

0 – 25 mm CE

for 1 mm CE

5 mm

	From +5 to +30°C
	From -30 to +60°C
	6 bars
	15 mm
	Ø 4 mm
	<i>from 0 to 5 mm CE :</i> <i>from 5 to 10 mm CE :</i> <i>from 10 to 15 mm CE :</i> <i>from 15 to 25 mm CE :</i>
	Horizontal positioning via integrated spirit level and milled, nickel-plated brass adjusting screw, vertical travel 12 mm
	AWS 10 (0.86)
	20 ml
	5 x 8mm 6.2 (AWS 10, VOLT 1S) , Delrin(), 1/8 gas thread
	PVC (/)

1. Ø 5 x 25 mm
- 2.
- 3.
- 4.
5. Ø 5x8

:

.....
.....
.....

"+"가
"- "가
" "+"가
"- "가

CP

1

www.kimo.fr

Distributed by :



EXPORT DEPARTMENT
Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29
e-mail : export@kimo.fr