



|  |                              |
|--|------------------------------|
|  | From +5 to +30°C             |
|  | From -30 to +60°C            |
|  | 14 bars                      |
|  | 20 mm PVC                    |
|  | 4mm for MERCURY              |
|  | 6mm for VF1                  |
|  | 54 × 3mm                     |
|  | 20mm                         |
|  | VF1( 13.545) MERCURY ( 1.00) |
|  | 5 × 8mm 6.2                  |
|  | Delrin( ), M 7x100 thread    |
|  | 2 Ø 5 X 25 mm                |

| Ref. | GF 500 | GF 1000 | GF 68  | GF 134  |
|------|--------|---------|--------|---------|
| a    | 607 mm | 1107 mm | 607 mm | 1107 mm |
| b    | 70 mm  | 70 mm   | 70 mm  | 70 mm   |
| c    | 25 mm  | 25 mm   | 25 mm  | 25 mm   |
|      | 571 mm | 1071 mm | 571 mm | 1071 mm |
|      | 540 g  | 980 g   | 800 g  | 1450 g  |

1. Ø 5 x 25 mm

2.


"0"

3.

4. Ø 5x8

가

.....  
 .....

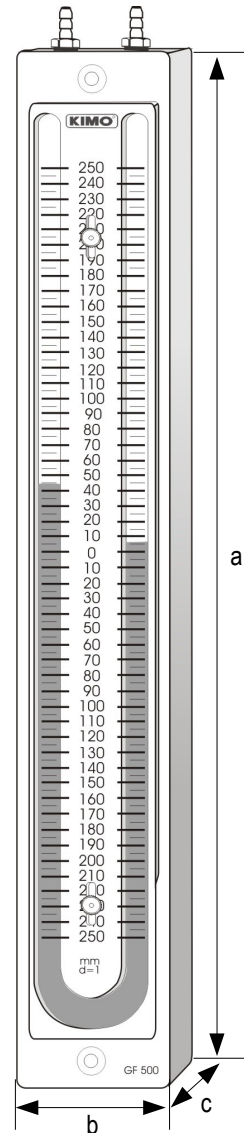

[www.kimo.fr](http://www.kimo.fr)

Distributed by :



EXPORT DEPARTMENT

Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29

e-mail : export@kimo.fr