

# HP

Pressure / Depression


HP  
HP  
가



- 
- 
- 
- 
- 가
- , 2 , 2 , 487 2 , PVC

	mm CE	Pascal	for 1 mm CE or 10 PA	
HP 5	0 – 5	0 – 50	20 mm	0,1 mm CE or 1 Pa
HP 10	0 – 10	0 – 100	15 mm	0,1 mm CE or 1 Pa
HP 15	0 – 15	0 – 150	10 mm	0,1 mm CE or 1 Pa

	From +5 to +30°C
	From -30 to +60°C
	6 bars
	20 mm
	Ø 4 mm
	20 x 2 mm.
	12 mm
	Horizontal positioning via integrated spirit level and milled, nickel-plated brass adjusting screw, vertical travel 12 mm.
	AWS 10 ( 0.87)
	20 ml
	5 x 8mm 6.2 (AWS 10, VOLT 1S ) , Delrin( ), 1/8 gas thread PVC ( / )

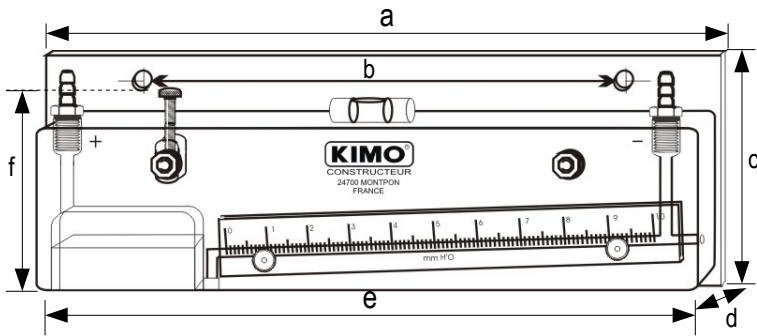

Reference	HP 5	HP 10	HP 15
a	184 mm	234 mm	234 mm
b	116 mm	166 mm	166 mm
c	80 mm	80 mm	80 mm
d	30 mm	30 mm	30 mm
e	180 mm	230 mm	230 mm
f	71 mm	71 mm	71 mm
	340 g	430 g	430 g

1. Ø 5 x 25 mm
- 2.
- 3.
- 4.
5. Ø 5x8

"0"

가

.....  
 .....  
 .....

"+"가  
 "- "가

"+"가  
 "- "가

HP

1

[www.kimo.fr](http://www.kimo.fr)

Distributed by :



**EXPORT DEPARTMENT**  
 Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29  
 e-mail : export@kimo.fr