



LX 50



- -
 -
 -
- 20

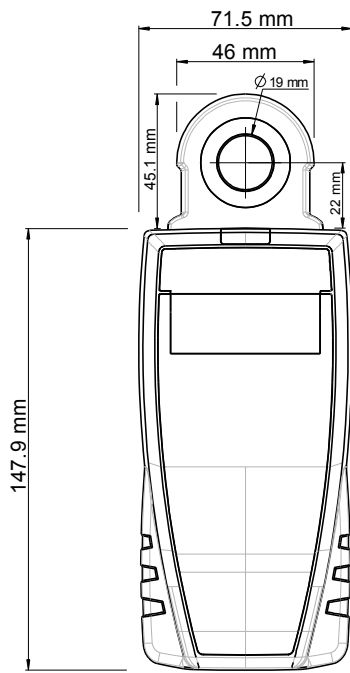

: ABS

: IP54

: 1 line

LCD 1 x 5 digits
Size : 50 x 20 mm

Height of digits :
Values : 9.2 mm
Units : 4.7 mm

: 200 g ()

	lux, klux, fc
	From 0 to 10000 lux / From 0 to 10 klux From 0 to 929 fc
	±3% of reading ±3 lux
	From 0 to 999.9 lux : 0.1 lux / from 1000 to 10000 lux : 1 lux From 0 to 0.9999 klux : 0.0001 klux / from 1 to 10 klux : 0.001 klux From 0 to 99.99 fc : 0.01 fc / from 100 to 929 fc : 0.1 fc
	Silicon Photodiode
	In accordance with the standard photopic curve V (λ) NF C 42-710 class C
V(λ) (f1)	<10%
true cosine (f2)	<6%
	<3%
	From 0 to +50 °C
	From -10 to +70 °C
	4 batteries AAA LR03 1.5 V
	20
	Directives CEM 2004/108/CE and NF EN 61010-1

* All the accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation



- ABS

(02-338-0023)

가 1

- On/Off/Hold LX50

- On/Off/Hold
- Hold 가
- On/Off/Hold

- Select 가 가

- 가 : LUX, FC, K LUX

- AAA LR03 1.5 V.
- 가

« Select »

« On/Off/Hold »



20

OFF



Once returned to KIMO, required waste collection will be assured in the respect of the environment in accordance to 2002/96/CE guidelines relating to WEEE.

www.kimo.fr

Distributed by :



EXPORT DEPARTMENT
Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29
e-mail : export@kimo.fr