

# MT40

Pressure / Depression

MT40


HVAC



- 가
- wjd
- 가
- 가
- , 가
- , ,

	(mm CE)	For 1 mm CE	
MT 40	0 – 40	4 mm	1 mm CE

	From +5 to +30°C
	From -30 to +60°C
	6 bars
	15 mm
	Ø 4 mm
	20 x 2 mm.
	20 mm
	Horizontal positioning via integrated spirit level and milled, nickel-plated brass adjusting screw, vertical travel 12 mm.
	VOLT 1S ( 1.86)
	20 ml
	5 x 8mm 6.2 ,

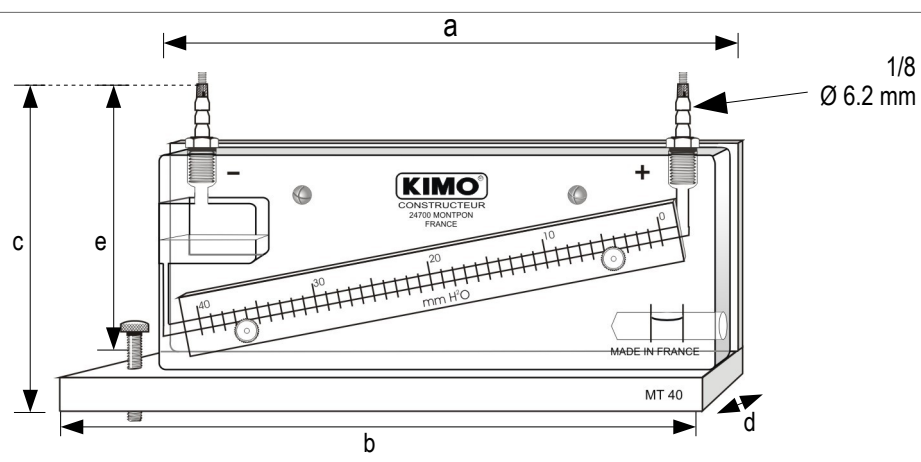

Reference	a	b	c	d	e	
MT 40	193 mm	208 mm	93 mm	37 mm	80 mm	800 g

1. , .

2. ' .

3. "0" .

4. .

5. Ø 5x8 가 .

:

..... "+"가 .

..... "-"가 .

..... "+"가 ,

..... "-"가 .

MT40 1

[www.kimo.fr](http://www.kimo.fr)

Distributed by :



**EXPORT DEPARTMENT**  
 Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29  
 e-mail : export@kimo.fr

Ref. FTang – MT – 17/08/11 - RCS 24 (24) Périgueux 349 282 095 Non-contractual document – We reserve the right to modify the characteristics of our products without prior notice.